


OASE GmbH
Tecklenburger Straße 161
D - 48477 Hörstel
Phone: +49(0)54 54 – 800
Fax: +49(0)54 54 – 80 322
info@oase-livingwater.com
www.oase-livingwater.com

WSS 20-3

51559




VDE 0100 Teil 702 beachten / See VDE 0100 section 702 / Respecter VDE 0100 paragraphe 738 / Veá VDE 0100 sección 702

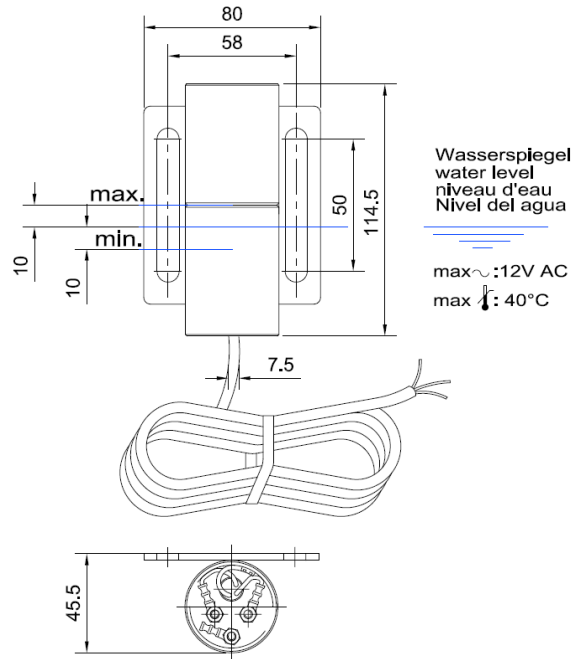

min. 0,75²
max. 50 m

OASE-EWR





Sensorkabel getrennt verlegen
install cable sensor separately
installer c/ble de sonde séparément
instalar el cable de la sonda por separado

Belegung der Anschlusskabeladern
Layout of connection cables wires
Occupation des câbles de connexion
Disposición de los cables de conexión

- | | |
|---------|--------------------------------------|
| Schwarz | - common Elektrode |
| black | - common electrode |
| noir | - électrode masse |
| negro | - electrodo común |
| | |
| Grau | - Tiefstandelektrode (min.) |
| grey | - low level electrode (min.) |
| gris | - électrode niveau inférieur (min.) |
| gris | - electrodo de nivel inferior (mín.) |
| | |
| Braun | - Höchststandelektrode (max.) |
| brown | - high level electrode (max.) |
| marron | - électrode niveau supérieur (max.) |
| marrón | - electrodo de nivel superior (máx.) |

galvanisch getrennter
Niveauregler oder
Elektrodenrelais -
galvanic separation of
the level regulator or
electrode relay -
régulateur de niveau
sépare par électrolyse
ou relais électrode -
separación galvánica
del regulador de nivel o
rele de electrodo

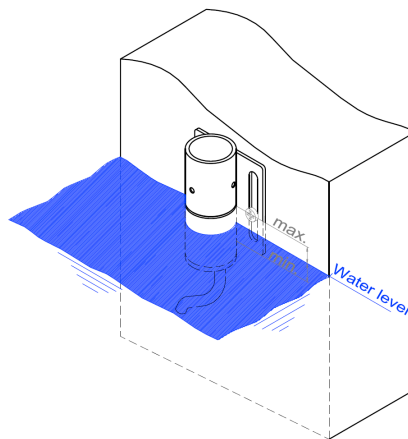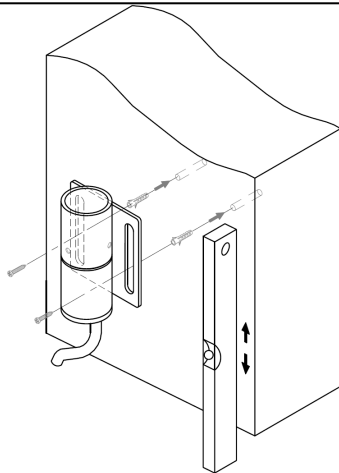

Water-level sensors		WSS 20-3
Dimensions (L x W x H) [mm]		115 x 80 x 46
Housing		stainless steel
Protection class		IP 68
Electrodes		3
Common		1
Minimum		1
Maximum		1
Dry-run		-
Level difference [mm]		20
Cable length [m]		10.0
Weight [kg]		2.2
Order no.		51559

- Product characteristics at a glance**
- For automatic infeed and top-up feed of freshwater if the water level drops
 - Dry-run protection and alarm function can be connected
 - Compensates for different water levels
 - Robust and reliable technology
 - Safe operation
- Produkteigenschaften auf einen Blick**
- übermittelt die Information zur Ein- und Nachspeisung von Frischwasser bei sinkendem Wasserstand
 - Trockenlaufschutz und Alarmfunktion anschließbar
 - Robuste und zuverlässige Technik
 - Sicherer Betrieb

Wasserstandssensoren		WSS 20-3
Abmessungen (L x B x H) [mm]		115 x 80 x 46
Gehäuse		Edelstahl
Schutzart		IP 68
Elektroden		3
Common		1
Minimum		1
Maximum		1
Trockenlauf		-
Niveauunterschied [mm]		20
Kabellänge [m]		10,0
Gewicht [kg]		2,2
Bestell-Nr.		51559

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.

14.06.2010_Guzb

Version 1.0

sheet 1/1