

OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase-livingwater.com
 www.oase-livingwater.com

Underwater Power Supply 250 24V/01 50733




Fresh water	Pool water	Sea water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug & Spray



Product characteristics at glance

- 24 V/DC Power Supply for underwater
- Fixing by 4 screw possible
- 4 x female 24 V/DC OASE connector
- IP 68 rated
- With patented connection method

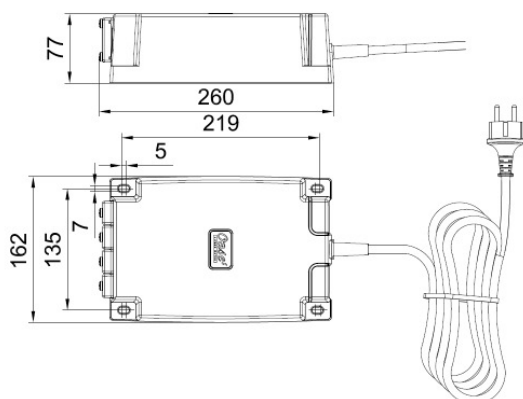

Underwater Power Supply 250 24V/01	
Dimensions(L x W x H)	[mm] 260 x 162 x 77
Nominal input voltage	[V/AC] 100-240
Nominal input frequency	[Hz] 50/60
Secondary voltage	[V/DC] 25
Secondary current	[A] 10,5
Efficiency	[%] ≥92
Stand by power consumption	[W] ≤1
Environmental conditions: submersible application	Water temperature: min 4°C to max. 35°C
Environmental conditions: dry application	Ambient temperature: max 30°C with natural convection, no direct sun exposure permitted
Slot	[V/DC] 4 x 24
Immersion depth	[m] 4
Protection class	IP 68
Cable length	[m] 10
Weight	[kg] 5,5
Order No.	50733

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.