


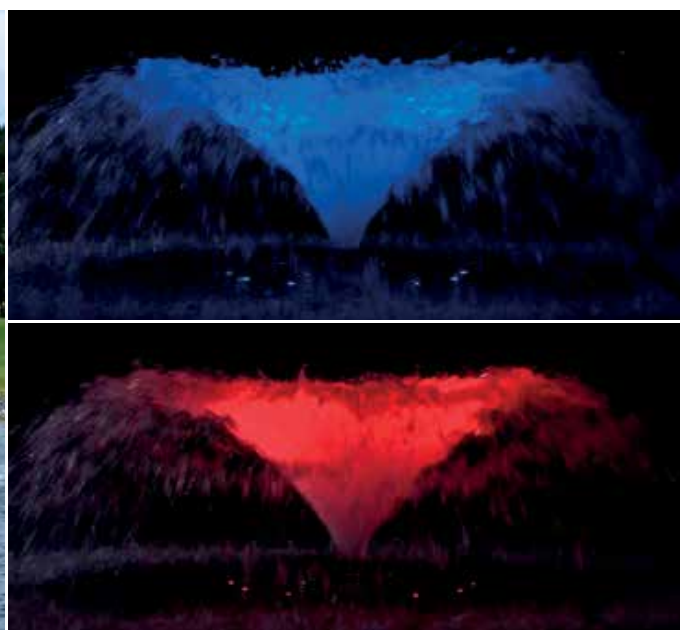

	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX / RDM	Plug and Spray
AirFlo 1.5 kW													
AirFlo 4.0 kW													



AIR FLO 1.5 kW / 4.0 kW

AirFlo sets new standards in the field of lake aeration and decoration: The axial propeller technology ensures impressive and unequalled water flow rates of up to 295,000 l/h – for an optimal supply of oxygen to the lake.




Product characteristics at a glance

- Floating aerator for oxygen supply through powerful water patterns for water surfaces up to 15,000 m²
- Axial propeller technology for water flow rates up to 295,000 l/h
- Maximum oxygen supply for the body of water
- Easy installation and maintenance through bayonet technology
- Foamed float for extraordinary stability and noise reduction

- Pump basket of corrosion resistant stainless steel
- Included in the scope of delivery:
Fastening set, 3-part nozzle attachment for 3 different types of water pattern “Trumpet”
- Lighting sets with stainless steel holder available as an accessory

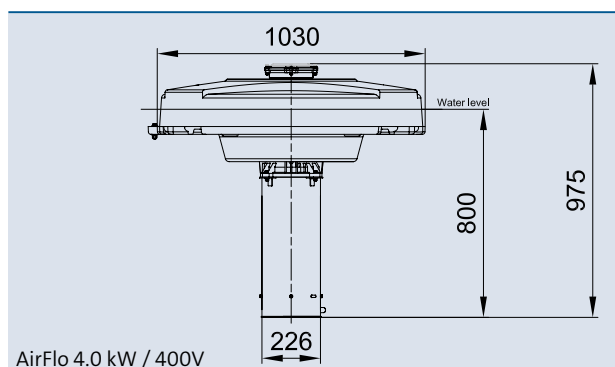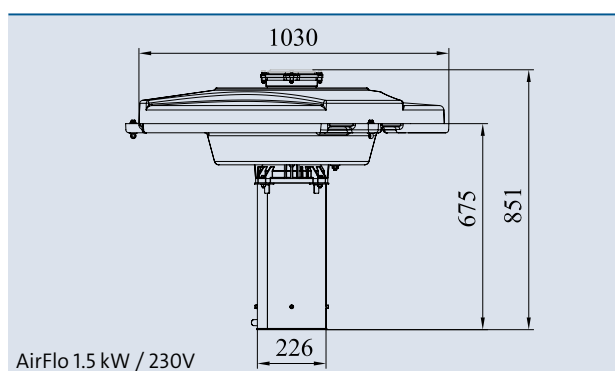

		
Bayonet technology For easy mounting.	Fastening material Easy and secure anchoring of the aerator thanks to the fastening material included in the scope of delivery. (3 x 30 m, 3 mm thick)	Earthing pin plug + control box The 230 V version is delivered ready to operate with control box. CEE-connector + protection switch The 400 V version comes with a ready to connect, 5 pole CEE connector and motor protection switch.

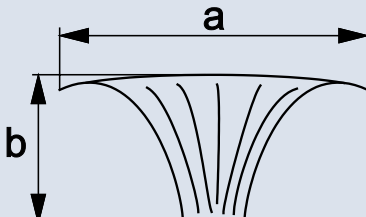	Water pattern »Trumpet« M		Water pattern »Trumpet« L		Water pattern »Trumpet« XL	
Power data of the 3 »Trumpet« type AirFlo water patterns (included in the scope of delivery)						
	Water pattern »Trumpet« M		Water pattern »Trumpet« L		Water pattern »Trumpet« XL	
	Fountain height x width*1 (b x a)	Flow rate	Fountain height x width*1 (b x a)	Flow rate	Fountain height x width*1 (b x a)	Flow rate
	[m]	[l/h]	[m]	[l/h]	[m]	[l/h]
AirFlo 1.5 kW / 230 V	0.6 x 2.5	165000	0.95 x 4	155000	1.8 x 6	120000
AirFlo 4.0 kW / 400 V	1.5 x 6.0	295000	2.0 x 8.0	265000	3 x 10	225000

*1 Guide values

Accessories (must be ordered separately)

	Order no.
LED-floating fountain illumination RGB (see page 114)	42641
LED-floating fountain illumination white (see page 114)	42637

		AirFlo 1.5 kW / 230V	AirFlo 4.0 kW / 400V
Dimensions (ø x H)	[mm]	1090 x 700	1090 x 980
Nominal voltage	[V/Hz]	230/50	400/50
Pump power	[kW]	1.5	4.0
Nominal current	[A]	10.2	9.6
Minimum water depth	[m]	0.90	1.15
Minimum lake size	[m²]	100	500
Opt. effect for lakes up to	[m²]	5000	15000
Suction depth max.	[m]	4.0	5.0
Cable length	[m]	50.0	50.0
Weight	[kg]	ca. 40.0	ca. 60.0
Order no.		50183	50185